

## Model 8542, Lo-Profile® 1-Station Pour-Over Coffee Brewer

### LO-PROFILE® DESIGN:

- less than 17" high, 14" deep . . . provides more brewing and holding capacity in less space.
- fits easily under cabinets, on counter tops.
- the modern look for today's decor.

### FEATURES:

- ALL STAINLESS STEEL CONSTRUCTION.  
Easy to maintain, easy to clean.
- ONE-PIECE DRAWN VERTICAL STAINLESS STEEL WATER TANK.  
For more efficient heating and longer product life.
- ONE-PIECE, PORCELAIN ENAMELED WARMER PLATE.  
Spin on/off for easy cleaning and servicing.  
Designed to position decanter securely.
- 100 WATT CALROD WARMER ELEMENT.
- HEAVY DUTY 16 AMP LIGHTED WARMER SWITCH.  
Easy to see when warmer is on or off.
- "READY-TO-BREW" LIGHT.  
Indicates proper water temperature to assure optimum coffee flavor.
- ADJUSTABLE RUBBER FEET.  
Allows leveling of brewer in any situation.
- EXCLUSIVE, EASY ACCESS TANK LID ASSEMBLY.  
Top is easily removed by loosening two screws for easy access to tank lid cover on which all controls are mounted.
- TEFLON COLOR CODED WIRING.  
Eliminates guesswork on all electrical connections.
- STAINLESS STEEL ROBERTSHAW THERMOSTAT.  
Pre-set at factory . . . unit is ready for operation at installation. Full-length stainless steel sensing bulb senses water temperature more accurately, cycles less frequently, lasts longer.
- LOW WATT DENSITY HEATING ELEMENT.  
Reduces element surface temperature, chance of failure and extends element life.
- PATENTED WATER DELIVERY SYSTEM WITH EXCLUSIVE WATER SPREADER DISC.  
Assures correct amount of water for every brew. No pressure points, no lime build-up. Spreads water gently over coffee grounds, creating a floating action and complete saturation of coffee for maximum coffee flavor.
- U.L. AND N.S.F. LISTED. For Canada: C.S.A. Certified #8542, 120V, 1300 watt tank, 1400 total watts.



### Bloomfield® Means Quality Built Into Every Brewer

Bloomfield® has established a new tradition in brewing: trouble-free, dependable equipment. Starting with the finest electrical components and top quality stainless steel, each coffee brewer is designed, engineered and built to give efficient worry-free service, year after year.

And the Bloomfield Lo-Profile brewing system offers an array of models, sizes and features to meet your exact needs.


In restaurants, offices or any place where rich, flavorful coffee is important, the preferred choice is Bloomfield.

## BLOOMFIELD®

BLOOMFIELD INDUSTRIES • 4545 WEST 41TH STREET, CHICAGO, ILLINOIS 60632 • 1-800-621-8556  
In Illinois: 1-312-254-7000 Fax: 1-312-254-8147  
In Canada: 9050 KEATON CRESCENT, MISSISSAUGA, ONTARIO L5H 3K2 • 416-907-1390  
Fax: 416-907-1777

# SPECIFICATIONS

## MODEL: 8542

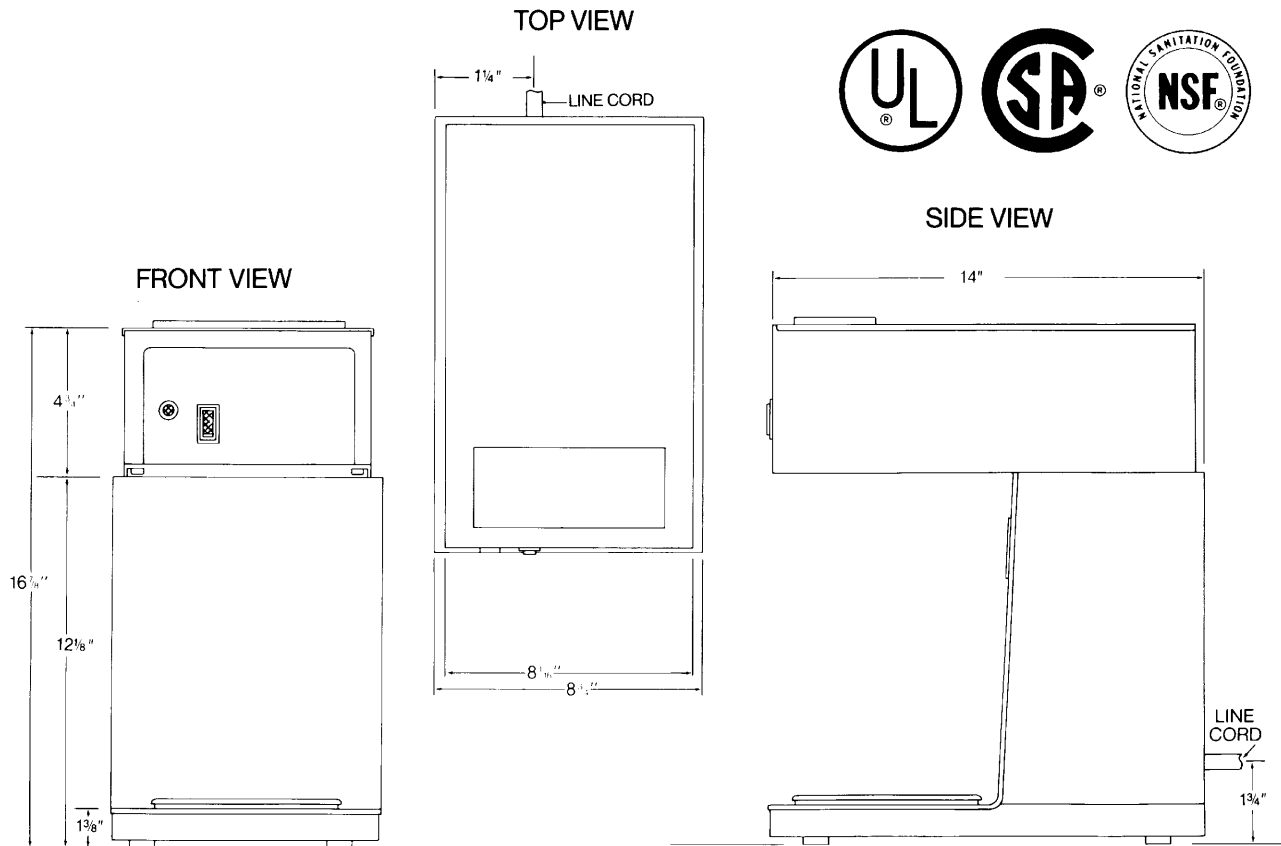

### DIMENSIONS:

14" deep, 8 3/4" wide, 16 7/8" high.  
Cube measurement: 2.90.

Brewer shipped complete with: 25 filters and brewing funnel. Shipping weight, 20 lbs.

### ELECTRICAL SPECIFICATIONS:

**Model #8542.** 120 volts, A.C. 60/hz. 1,500 watt tank element. Total wattage: 1,600 watts, 15 amps. Complete with cord and plug.

### BREWER ACCESSORIES. (Not Illustrated)


**#8545. Double Module Connecting Kit.** Connects Brew Module and One Double Step-Up Warmer Module.

**#8544. 4" Extension Leg Kit.** For all Bloomfield Brewers.

### KOFFEE-KING® ACCESSORIES



**#8553 2-Station Step-up Warmer.** 120 volts, 200 watts. 14" deep, 7 1/2" wide, 5 3/4" high. Cord and plug included. (5 lbs.) Lo-Profile.



**#8900 Imprinted Glass Decanters.** 10-12 cup capacity. Custom imprinting available with minimum order requirement.  
#8900. Regular Decanter.  
#8901. Decaffeinated Decanter. Orange.



**Koffee-King® Decanters.** Made of Udel™ polysulfone and 18-8 stainless steel. 10-12 cup capacity. Virtually unbreakable.  
#8889. Decaffeinated Decanter. Orange.  
#8890. Koffee-King® Decanter. Black.

# BLOOMFIELD®

BLOOMFIELD INDUSTRIES - 2 ERIK CIRCLE P.O. BOX 280, VERDI, NV 89439  
1-800-621-8556 • Fax: 1-800-356-5142

In Canada: 5850 KEATON CRESCENT, MISSISSAUGA, ONTARIO L5R 3K2 • 905-507-1700  
Fax: 905-507-1777